

EF-SERIES

Model	Driver Type	Item #	Torque Ranges	
			lbf.in	cN.m
EF080-A	Lever Start	145702	0.5 - 6.9	4.9 - 78.4
EF080-A ESD	Lever Start	145704	0.5 - 6.9	4.9 - 78.4
EF080P-A	Push-to-Start	145703	0.7 - 6.9	7.9 - 78.4
EF080P-A ESD	Push-to-Start	145705	0.7 - 6.9	7.9 - 78.4
EF120-A	Lever Start	145706	0.5 - 10.4	4.9 - 117.6
EF120-A ESD	Lever Start	145708	0.5 - 10.4	4.9 - 117.6
EF120P-A	Push-to-Start	145707	0.7 - 10.4	7.9 - 117.6
EF120P-A ESD	Push-to-Start	145709	0.7 - 10.4	7.9 - 117.6

Model	RPM		Grip Dia.	Length	Drive Size	Weight
	High	Low				
EF080-A	1000	670	1 1/4"	8 1/2"	1/4" F/Hex	11 oz.
EF080-A ESD	1000	670	1 1/4"	8 1/2"	1/4" F/Hex	11 oz.
EF080P-A	1000	670	1 1/4"	8 1/2"	1/4" F/Hex	11 oz.
EF080P-A ESD	1000	670	1 1/4"	8 1/2"	1/4" F/Hex	11 oz.
EF120-A	700	460	1 1/4"	8 1/2"	1/4" F/Hex	11 oz.
EF120-A ESD	700	460	1 1/4"	8 1/2"	1/4" F/Hex	11 oz.
EF120P-A	700	460	1 1/4"	8 1/2"	1/4" F/Hex	11 oz.
EF120P-A ESD	700	460	1 1/4"	8 1/2"	1/4" F/Hex	11 oz.


K-SERIES

Model	Driver Type	Item #	Torque Ranges	
			lbf.in	cN.m
K250-A	Lever Start	145660	1.8 - 21.7	19 - 245
K250-A ESD	ESD (Lever Start)	145665	1.8 - 21.7	19 - 245
K250P-A	Push-to-Start	145669	1.8 - 21.7	19 - 245
K250P-A ESD	ESD (Push-to-Start)	145673	1.8 - 21.7	19 - 245
K350-A	Lever Start	145661	1.8 - 30.3	19 - 343
K350-A ESD	ESD (Lever Start)	145666	1.8 - 30.3	19 - 343
K350P-A	Push-to-Start	145670	1.8 - 30.3	19 - 343
K350P-A ESD	ESD (Push-to-Start)	145674	1.8 - 30.3	19 - 343
K450-A	Lever Start	145662	2.6 - 39	30 - 441
K450-A ESD	ESD (Lever Start)	145667	2.6 - 39	30 - 441
K450P-A	Push-to-Start	145671	2.6 - 39	30 - 441
K450P-A ESD	ESD (Push-to-Start)	145675	2.6 - 39	30 - 441

Model	RPM		Grip Dia.	Length	Drive Size	Weight
	High	Low				
K250-A	1050	630	1 1/2"	10 1/4"	1/4" F/Hex	21.2 oz.
K250-A ESD	1050	630	1 1/2"	10 1/4"	1/4" F/Hex	21.2 oz.
K250P-A	1050	630	1 1/2"	10 1/4"	1/4" F/Hex	21.2 oz.
K250P-A ESD	1050	630	1 1/2"	10 1/4"	1/4" F/Hex	21.2 oz.
K350-A	750	460	1 1/2"	10 1/4"	1/4" F/Hex	21.2 oz.
K350-A ESD	750	460	1 1/2"	10 1/4"	1/4" F/Hex	21.2 oz.
K350P-A	750	460	1 1/2"	10 1/4"	1/4" F/Hex	21.2 oz.
K350P-A ESD	750	460	1 1/2"	10 1/4"	1/4" F/Hex	21.2 oz.
K450-A	550	330	1 1/2"	10 1/4"	1/4" F/Hex	21.2 oz.
K450-A ESD	550	330	1 1/2"	10 1/4"	1/4" F/Hex	21.2 oz.
K450P-A	550	330	1 1/2"	10 1/4"	1/4" F/Hex	21.2 oz.
K450P-A ESD	550	330	1 1/2"	10 1/4"	1/4" F/Hex	21.2 oz.

NOTE!

For Torque Chart, see pages 02.2 & 02.3

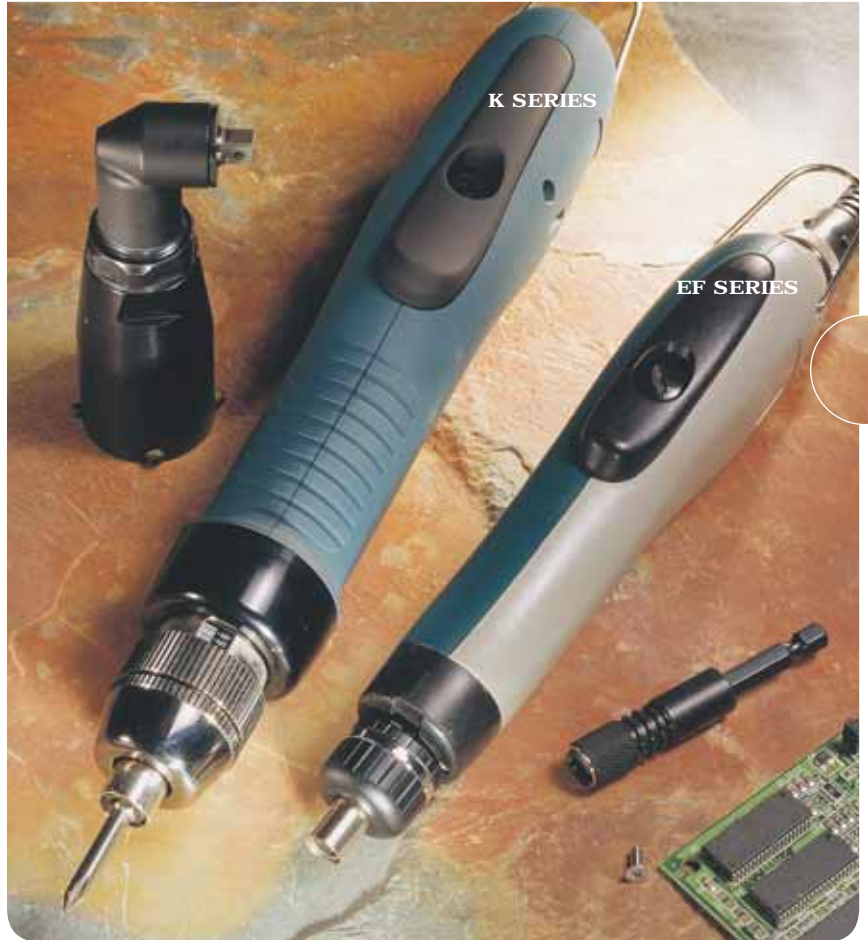

E-DRIV® EF & K-Series

Electric Torque Screwdrivers Low Voltage DC

KEY FEATURES

Various models that range from 0.5 lbf.in to 39 lbf.in.

Rugged production tools designed to increase productivity and enhance product quality through precision torque control and user comfort.

Ensures accuracy in fastening with precision automatic shut-off clutch once preset torque is achieved.

External torque adjustment scale.

Available in Lever, Push-to-Start, and ESD models.

Requires a transformer (power supply).



MOUNTZ RIGHT ANGLE ADAPTER

See Page 02.19



TRANSFORMER

A transformer is required for the drivers.

See Pages 02.17 & 02.18



TORQUE COVER

Item #145615 (for K-Series)

Protects the tool from incidental or operator tampering of torque setting.

Item #145700

For EF-Series (EF080 and EF120 models only.)

etorque.com

ISO 9001 and ISO 17025 Company

EF-Series & K-Series

02.6