


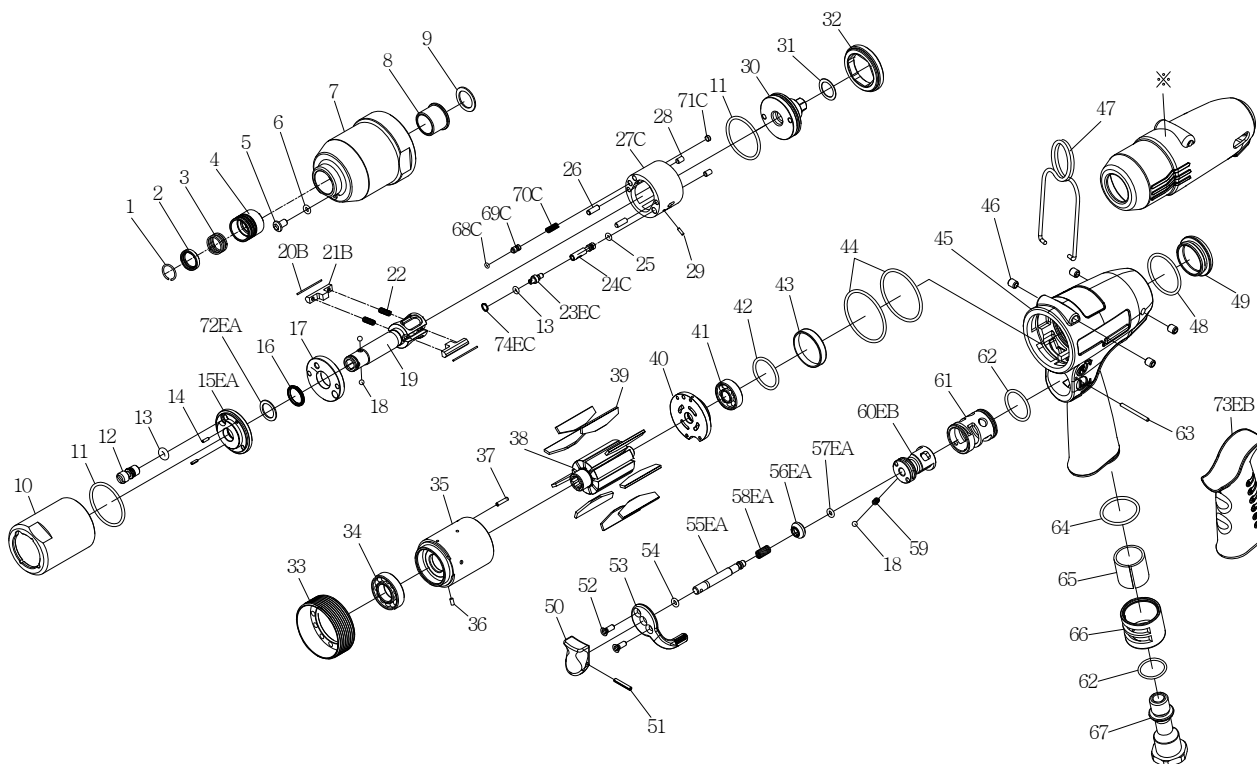

Recommendations for Maintenance:

Please, note it is important to make sure the tool has clean, dry and lubricated air at the recommended pressure supplied to it. (Please consult the service manual for further instructions)

The pulse tool requires preventive maintenance like oil changes and have the parts inspected periodically. It is recommended to make the first preventive maintenance at 250,000 pulses-seconds or 6 months, whichever one occurs first. The tool's performance should be evaluated. The oil needs to be changed. Inspect all the soft parts of the pulse unit (the soft parts are referenced as the "Repair Kit" - see parts list page 2). The Repair Kit includes all the necessary parts and it is recommended to be performed every six months (unless parts are in good condition). If the tool fails before the 250,000 pulses-seconds then the pulse unit needs to be rebuilt, with the "Repair Kit" and "Service Kit" (see parts list page 2).
Caution: prevailing torque, which makes that the tool start pulsing early, reduces the life of the Oil & O-rings of the pulse unit. A pulse-second is not every second the tool is running, only when it's "pulsing" and applying torque. On typical applications the tool should run down freely until fastener is snug and then the tool starts pulsing until it reaches the preset torque. When operating the tool on the fastener, start counting once the tool begins pulsing. You can use a watch with a second hand and time it until the tool shuts-off. Use the information to calculate how many pulse-seconds the tool performs per application each day. Then perform some basic math to calculate the tool's maintenance schedule. Use this formula.

$$\# \text{ Pulsing Seconds} \div \text{Total of Pulsing Time} = \text{No Cycles}$$

NOTE: Please include the rework, reverse, or retightening time involved on the operation to calculate the accurate pulsing time. Here is an example:

Pulsing Time = 2 seconds
Pulses- seconds recommended = 250,000

$$250,000 \text{ pulses-sec} \div 2 \text{ sec} = 125,000 \text{ cycles}$$

Index No.	Part No.	Description	Q'ty	Index No.	Part No.	Description	Q'ty
1	63-757-026	Anvil Collar	1	43	63-I40-307	Rear Cover	1
2	63-I40SD-419	Hold Spacer	1	44	63-00-41144	O-Ring	2
3	63-I40SD-418	Spring	1	45	63-I40-101	Motor Housing	1
4	63-I40SD-417	Quick change Hold	1	46	63-I40S-108	Bushing	4
5	63-I100-410	Greasing Screw	1	47	63-I40S-102	Hanger	1
6	63-00-4153	O-Ring	1	48	63-00-41146	O-Ring	1
7	63-I40S-201	Pulse Unit Housing	1	49	63-I40-104	Nut	1
8	63-I40S-202	Bushing	1	50	63-I40-504	Trigger	1
9	63-I40S-424	Washer	1	51	63-00-3354	Spring Pin	1
10	63-I40S-401	Pulse Cylinder Seat	1	52	63-00-0505	Screw	2
11	63-00-41127	O-Ring	2	53	63-I100-503	Regulator Knob	1
12	63-I70-410	Greasing Screw	1	54	63-00-4101	O-Ring	1
13	63-00-41113	O-Ring	2				