


MICRO-TORQUE

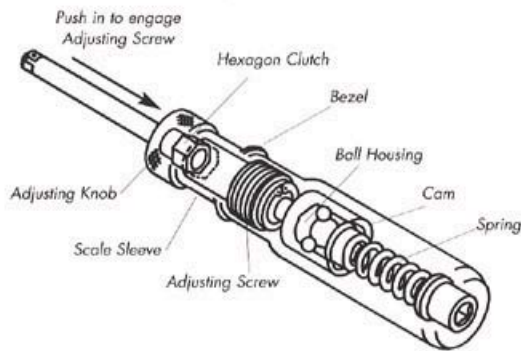

Torque Screwdrivers - Limiting, Externally Adjustable

The preferred and certified ranges of these tools is in accordance with the requirements of ISO 6789:1992.

Various models that range 20 ozf.in - 80 lbf.in in American or S.I. graduated scales.

Micrometer adjustment allows accurate setting of the tool.


Adjustment knob disengages to prevent accidental adjustment.

The cam "slips free" once the set torque has been reached making over tightening impossible.

Available in 1/4" male square and 1/4" female Hex drive.

Removable sliding T-bar (except MT120 and MT12) provides added leverage where required.

Color coded anodized aluminum handles allow for differentiation of models.

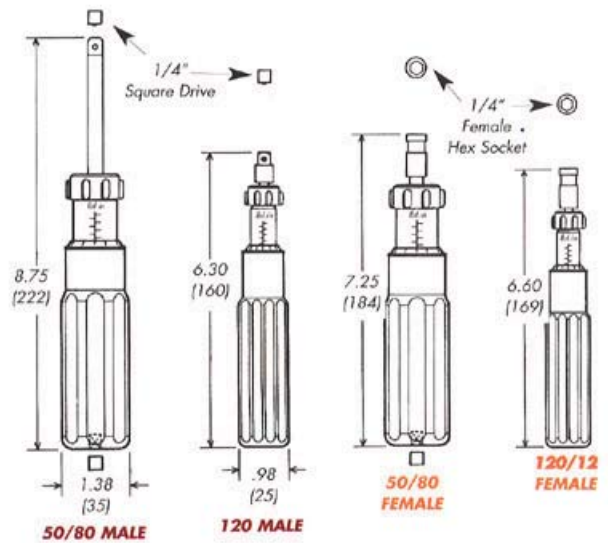

1/4" MALE SQUARE DRIVES

1/4" FEMALE HEX DRIVES

| Model | Item# | Model | Item# | Color | Torque Ranges | Graduations |
|---------|--------|-----------|--------|-------|-----------------|-------------|
| MT120-A | 020375 | MT120-AFH | 020374 | Black | 20 - 120 ozf.in | 1 ozf.in |
| | | MT12-AFH | 020369 | Grey | 2 - 12 lbf.in | .1 lbf.in |
| MT50-A | 020370 | MT50-AFH | 020373 | Red | 5 - 50 lbf.in | 1 lbf.in |
| MT80-A | 020383 | MT80-AFH | 020384 | Green | 40 - 80 lbf.in | 1 lbf.in |
| MT120-N | 020376 | MT120-NFH | 020377 | Black | 20 - 120 cN.m | 1 cN.m |
| MT6-N | 020379 | MT6-NFH | 020380 | Red | 1 - 6 N.m | .1 N.m |
| MT9-N | 020381 | MT9-NFH | 020382 | Green | 4 - 9 N.m | .1 N.m |

• "A" and "AFH" designates American Models **OR** "N" and "NFH" designates S.I. Models.