

MICRO-TORQUE

Torque Screwdrivers - Limiting, Externally Adjustable



The preferred and certified ranges of these tools is in accordance with the requirements of ISO 6789:1992.

Various models that range 20 ozf.in - 80 lbf.in in American or S.I. graduated scales.

Micrometer adjustment allows accurate setting of the tool.



Adjustment knob disengages to prevent accidental adjustment.

The cam "slips free" once the set torque has been reached making over tightening impossible.

Available in 1/4" male square and 1/4" female Hex drive.

Removable sliding T-bar (except MT120 and MT12) provides added leverage where required.

Color coded anodized aluminum handles allow for differentiation of models.

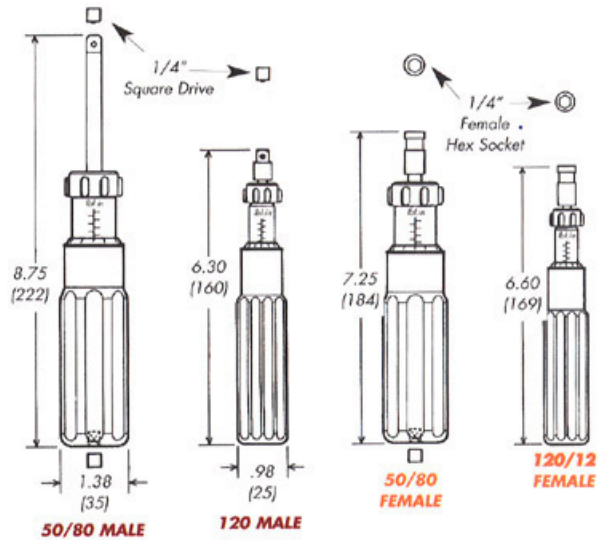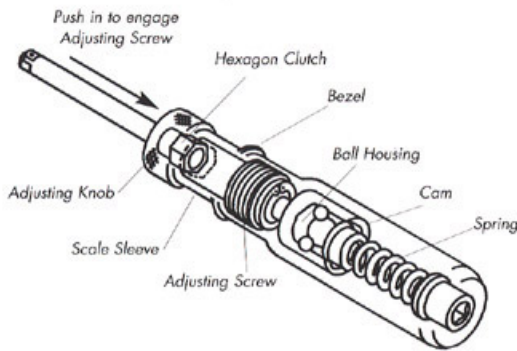

1/4" MALE SQUARE DRIVES

1/4" FEMALE HEX DRIVES

Model	Item#	Model	Item#	Color	Torque Ranges	Graduations
MT120-A	020375	MT120-AFH	020374	Black	20 - 120 ozf.in	1 ozf.in
		MT12-AFH	020369	Grey	2 - 12 lbf.in	.1 lbf.in
MT50-A	020370	MT50-AFH	020373	Red	5 - 50 lbf.in	1 lbf.in
MT80-A	020383	MT80-AFH	020384	Green	40 - 80 lbf.in	1 lbf.in
MT120-N	020376	MT120-NFH	020377	Black	10 - 120 cN.m	1 cN.m
MT6-N	020379	MT6-NFH	020380	Red	1 - 6 N.m	.1 N.m
MT9-N	020381	MT9-NFH	020382	Green	4 - 9 N.m	.1 N.m

• "A" and "AFH" designates American Models OR "N" and "NFH" designates S.I. Models.