
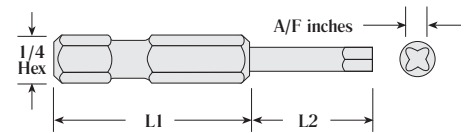
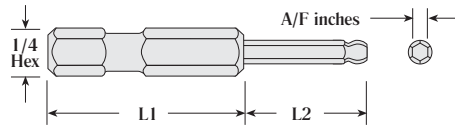


When ordering special extended bits, we need the specific information below to provide a quote.

Special Bits

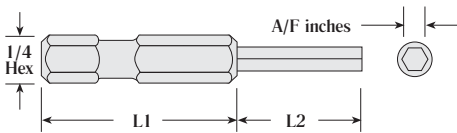

HEX BITS or BLADES

AMERICAN		METRIC	
A/F	L2 (max.)	A/F	L2 (max.)
.05"	3"	1.5mm	3 1/4"
1/16"	3 1/4"	2mm	4 3/4"
5/64"	3 1/2"	2.5mm	5 1/2"
3/32"	3 3/4"	3mm	7 1/4"
7/64"	7"	3.5mm	4 1/2"
1/8"	7 1/2"	4mm	8 1/4"
9/64"	8"	5mm	9 1/4"
5/32"	8 1/2"	6mm	10"
3/16"	9 1/4"	8mm	10 3/4"
1/4"	6"		
5/16"	7"		


BALL POINT BITS or BLADES

AMERICAN		METRIC	
A/F	L2 (max.)	A/F	L2 (max.)
.05"	3"	1.5mm	3 1/4"
1/16"	3 1/4"	2mm	4 3/4"
5/64"	3 1/2"	2.5mm	5 1/2"
3/32"	3 3/4"	3mm	7 1/4"
7/64"	7"	3.5mm	4 1/2"
1/8"	7 1/2"	4mm	8 1/4"
9/64"	8"	5mm	9 1/4"
5/32"	8 1/2"	6mm	10"
3/16"	9 1/4"	8mm	10 3/4"
1/4"	6"		
5/16"	7"		


SPLINE BITS or BLADES

A/F	L2 (max.)	Flutes
.048"	2.7"	4
.060"	2.7"	6
.069"	2.7"	6
.072"	2.7"	6
.076"	2.7"	6
.096"	2.7"	6
.0111"	2.7"	6
.145"	4.5"	6


ORDERING SYSTEM

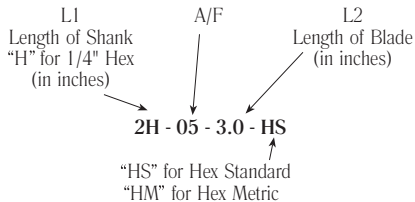

ORDERING SYSTEM

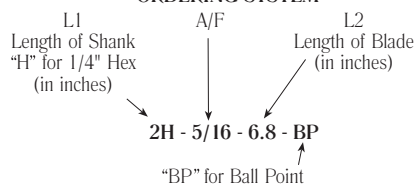

ORDERING SYSTEM

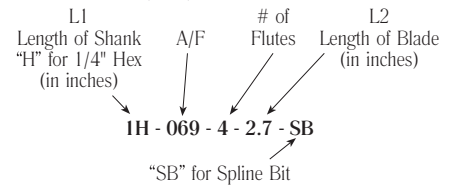

NOTE!

Bits in excess of 4" long are subject to "bowing".



TLS MINIMASTER HAND SCREWDRIVER

Torque Limiting Screwdriver
Internally Adjustable
See Section 01
Page 01.3 & 01.4

etorque.com

ISO 9001 and ISO 17025 Company

SPECIAL BITS

04.1