



Torque Chart

Eliminator CLD & CLS

ELIMINATOR CLD

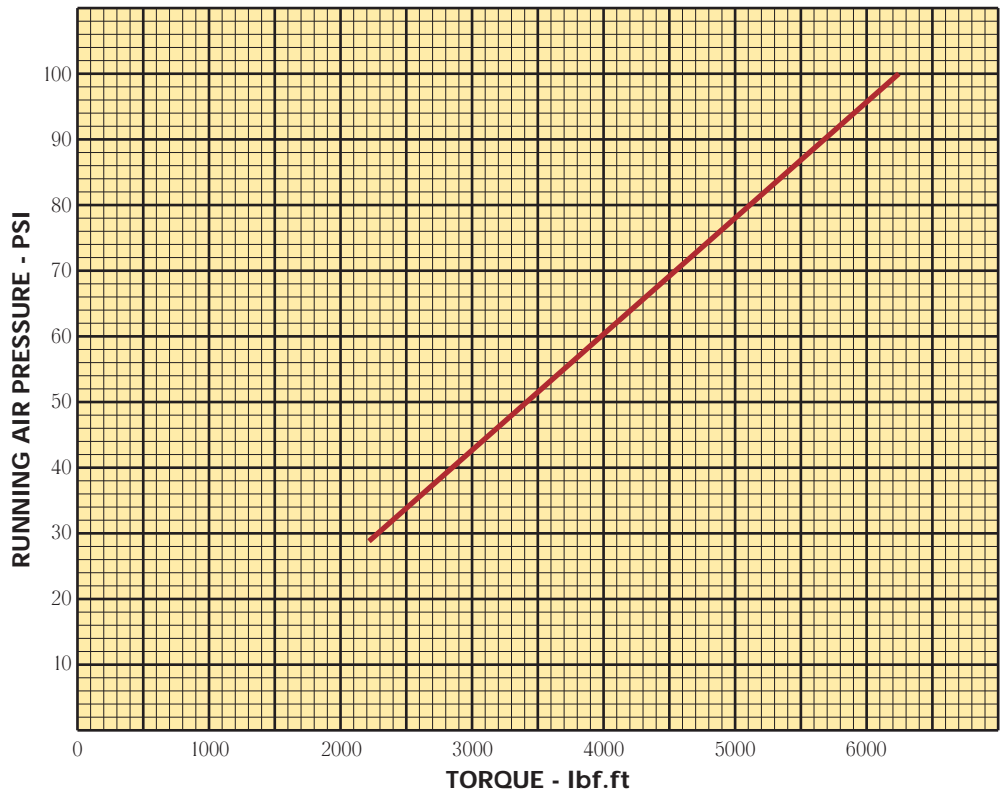

ELIMINATOR CLS

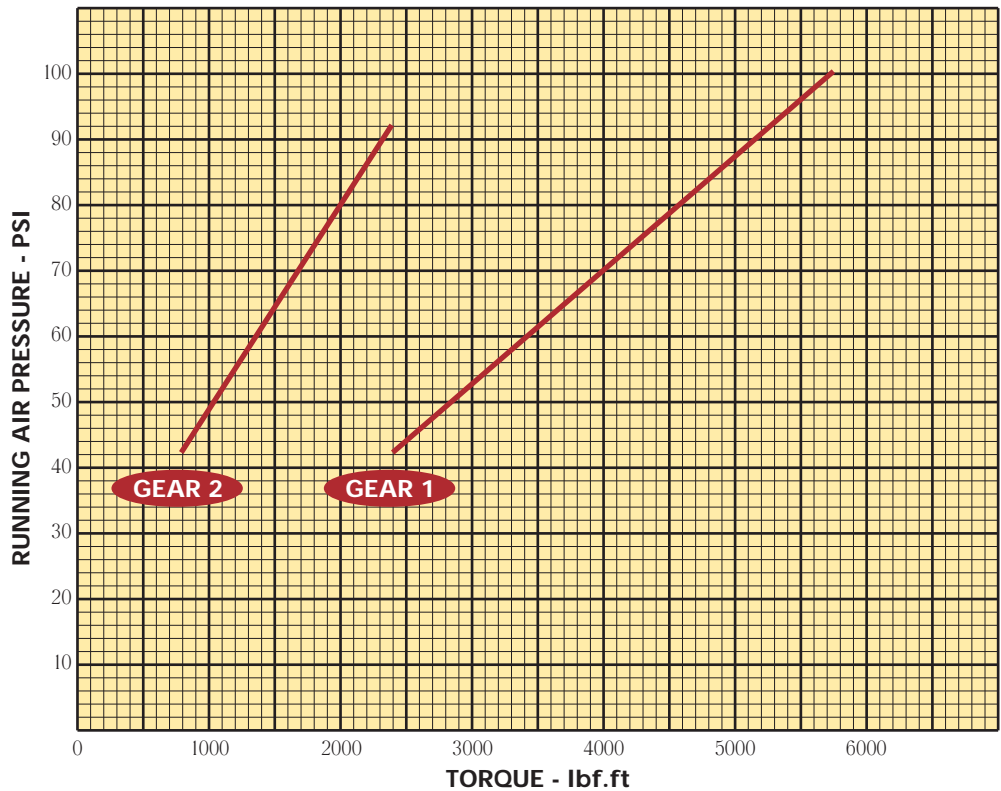

PHYSICAL EASE

Vibration-free operation prevents operator fatigue.

NOISE

Only 81 decibels at three feet (one meter).

SAFETY

Smooth continuous operation is safer than the vibration and hammering of typical impact wrenches.

TORQUE CONTROL

Torque control is obtained with the use of an air pressure regulator. Exhaustive tests have shown that torque multipliers will stall out consistently to within $\pm 5\%$ of the same torque figure at a given constant air pressure.

NOTE!

All curves are approximate values. Many factors such as differences in compressed air supplies, joint characteristics, and other application related variables can cause deviations from reported torque output.