
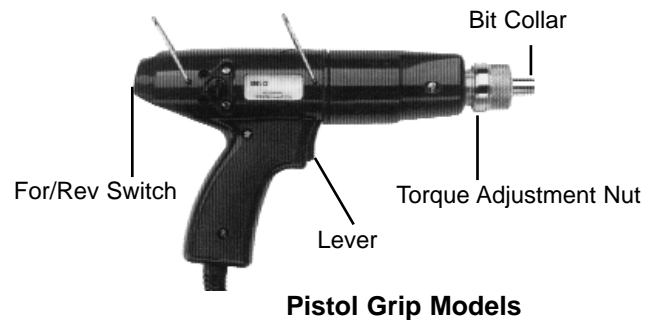


A4500 - 6500 Operating Instructions

Rev 2.0 (May 18, 2011)

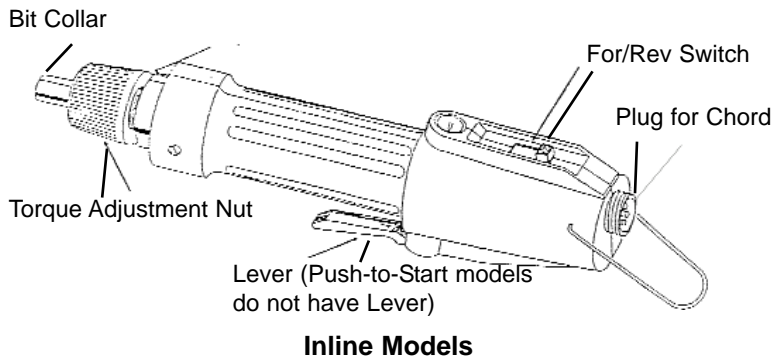

Operating the Tool

1. Attach cord to the A-Series driver. Make sure notch in plug lines up with the notch on the socket. Tighten knurled ground ring. Attach cord to a transformer (Transformer required to operate the tool). Make sure notch in plug lines up with the notch on the socket. Tighten knurled ground ring.
2. Select a bit. Retract the bit collar. Insert the bit and release the retracted collar. To avoid damaging fasteners, make sure the proper bit is suitable for the head of the fastener.
3. The torque limit is determined by the tension of the coil spring housed in the torque adjustment nut. The tighter the coil spring is wound the higher the torque limit is raised. See Charts on page 2 to determine the appropriate torque adjustment setting.
4. Rotate the torque adjustment nut to set the torque limit. Turn clockwise to increase torque and counter clockwise to decrease torque. The scale adjacent to the Torque Adjustment Nut is a reference guide. The torque output from the driver can change depending on various fastening factors like friction, type of joint, and the type material being used like a washer.
5. Plug in transformer and check power indicator. If it is not on, check fuse in the transformer.
Transformers - Standard transformers feature a HIGH & LOW speed button. Select the appropriate speed for your application. A variable speed transformer allows you to adjust the speed of the A-Series driver with a dial. The driver can ramp up from a soft start to a higher speed. (Only use the transformers listed in the Mountz catalog for appropriate A-Series driver model).
6. Turn driver on and check for proper rotation. FOR-clockwise, REV-counterclockwise.
7. To apply torque, squeeze the lever (Push-to-Start models - place light downward pressure on the nose of the driver). The driver will automatically stop when the preset torque has been reached.
8. To remove the screw, turn the FOR/REV switch to REV.

HOW TO REPLACE THE CARBON BRUSH

WARNING: When replacing the carbon brushes, detach the cord from the driver body or unplug the transformer from the power outlet.

1. The carbon brush piece is 1/3" long when new. Change the pair when they are worn to about half the original length.
2. Insert a flat tip screwdriver into the slot in the carbon brush cap and unscrew the cap.
3. Replace the worn brushes with new pair. The contact surface of the brush is concave. Insert the brush so that the concave end properly aligns with rounded surface of motor commutator.

CARE

1. The A-Series screwdrivers are a precision torque control instrument and should be handled with care at all times.
2. Only use the transformers listed in the Mountz catalog for appropriate A-Series driver model (If you have any questions regarding the appropriate transformer set-up, contact Mountz Customer Service Department).
3. Operate under safe conditions. Do not place in operation where such objects as hair, strings, clothing, etc. can become tangled in the rotating bit.
4. Keep away from moisture. Never use in high humid, moist or damp environment.

A4500 - 6500 Operating Instructions

Rev 2.0 (May 18, 2011)

Torque Reference Charts

These charts are meant to be used as guidelines for setting the torque on the A-Series electric screwdrivers. The drivers have a torque scale on the torque adjustment nut showing reference numbers. These numbers determine the approximate torque setting. Refer to the charts to determine the reference number setting for your torque requirement.




Torque ranges (lbf.in) approximate tightening torque, operated on 30V. Figures below each chart indicate scale setting on the tool.

Color of Springs:

GR = Green

S = Silver

Y = Yellow

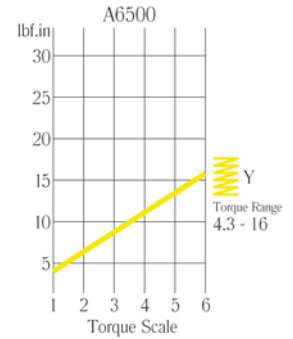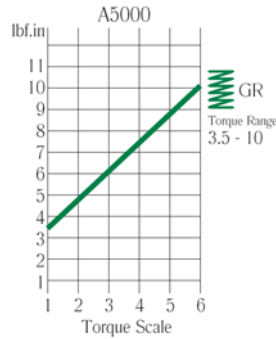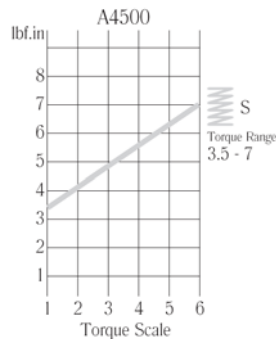

Testing Power Tools:

1. Application Method: Use a torque tester in "Peak Mode" with a rotary torque sensor between the power tool and the actual application. This is the best way to test since you are using the actual joint as the test station. You will see the actual torque applied to the fastener. **Caution:** Variances in tool performance may occur do to the addition of the rotary torque sensor.
2. Simulated Method: Always use a quality joint rate simulator (run down adapter) with a torque tester when testing power tools in a simulated application. Use Joint rate and Breakaway methods to obtain most accurate torque readings in a simulated rundown.

Mountz Calibration & Repair Services

Mountz Inc. features an experienced calibration and repair staff. Our trained technicians can calibrate and repair most any tool. Mountz provides rapid service with quality that you can trust as we offer three state-of-the-art calibration lab and repair facilities that can calibrate up to 20,000 lbf.ft.

With over 45 years of experience, Mountz's in-depth knowledge of torque is reflected in our tool's craftsmanship and our ability to provide solutions to both common and uncommon torque applications. We perform calibrations in accordance with ANSI/NCSL-Z540. Mountz is dedicated solely to the manufacturing, marketing and servicing of high quality torque tools.

Mountz is an ISO 9001 certified and ISO 17025 accredited company.

Contact
Mountz Inc.
Phone: 408.292.2214
Fax: 408.292.2733
sales@mountztorque.com
www.mountztorque.com

Looking for fasteners?
www.mrmetric.com

